


ZeeWeed* 500D Module

Module Dimensions			
Product	Width (A) mm (in)	Height (B) mm (in)	Depth (C) mm (in)
370, 340	844 (33.2)	2,198 (86.5)	49 (1.9)
440			52 (2.05)
300s		1,835 (72.25)	49 (1.9)
350s			52 (2.05)

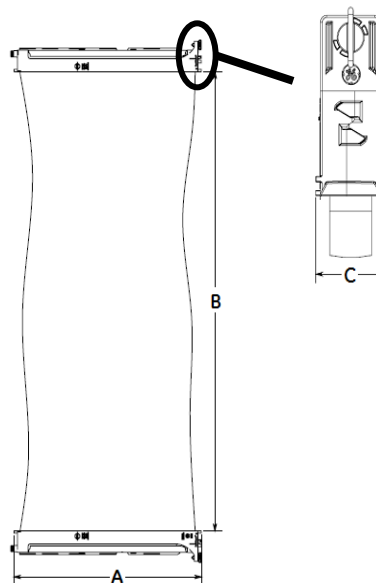

Module Properties									
Application	Product	Nominal Membrane Surface Area m ² (ft ²)	Max. Shipping Weight ¹ kg (lb)	Lifting Weight ² kg (lb)	Material	Nominal Pore Size (µm)	Surface Properties	Fiber Diameter (mm)	Flow Path
MBR	370	34.4 (370)	28 (61)	28 - 75 (61 - 164)	PVDF	0.04	Non-ionic & Hydrophilic	OD: 1.9 ID: 0.8	Outside-In
	300s	27.9 (300)	24 (53)	24 - 58 (53 - 128)					
Non-MBR	440	40.9 (440)	32 (70)	30 - 74 (66 - 163)					
	350s	32.5 (350)	26 (57)	26 - 72 (57 - 159)					
All	340	31.6 (340)	26 (61)	26 - 60 (57 - 132)					

Operating & Cleaning Specifications							
Application	Product	TMP Range kPa (psig)	Max. Operating Temp. °C (°F)	Operating pH Range	Max. Cleaning Temp. °C (°F)	Cleaning pH Range	Max. Cl ₂ Conc'n (ppm)
MBR	370, 340, 300s	-55 to 55 (-8 to 8)	40 (104)	5.0-9.5	40 (104)	2.0 - 10.5 (<30°C) 2.0 -10.0 (30-40°C)	1,000
Non-MBR	440, 340, 350s	-90 to 90 (-13 to 13)					

¹ Packaged

² Varies with solids accumulation



Find a contact near you by visiting www.gewater.com and clicking on "Contact Us".
* Trademark of General Electric Company; may be registered in one or more countries.

©2016, General Electric Company. All rights reserved.